




# COIL

## Spade terminals (DIN 46340)

Z1..

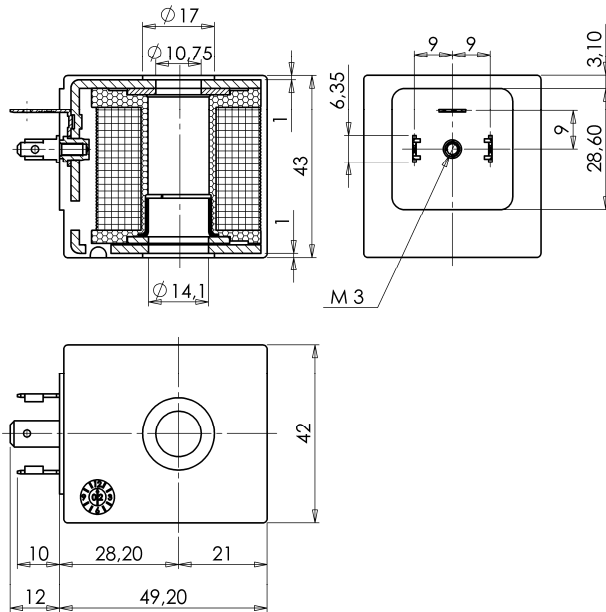

### ► GENERAL FEATURES

Complying with 2014/35/EU (LVD) and 2014/30/EU (EMC) directives.  
Product in accordance with the RoHS 2 directive.  
100% inspected.

### ► ELECTRIC CONNECTIONS

Spade terminals 6,3 x 0,8 (DIN46340), 2 line + 1 earth terminals.  
3 poles plug connector (DIN 43650)

### ► ENCAPSULATION MATERIALS

PET (polyethylene terephthalate) fiberglass reinforced (black colour).

### ► TECHNICAL FEATURES

*Continuous duty*

*Insulation class*

*Ambient temperature*

*Protection degree*

*Voltages DC*

*AC*

ED 100%

Z130A - Z130C : F (140°C)

Z134A : H (165°C)

Z130A - Z130C : -10°C +60°C

Z134A : -10°C +80°C.

IP 65 (EN 60529) with plug connector  
12-24V (+10% -5%)

24V/50Hz – 110V/50Hz (120V/60Hz) -

230V/50Hz (+10% -15%)

(Other voltages and frequencies on request).

TYPE	POWER ABSORPTION			NOTES	WEIGHT (kg)
	AC (VA)		DC (W)		
	Inrush	Holding			
Z130A	44	24	13	-	0,290
Z130C	-	-	6,5	-	
Z134A	44	24	13	1	

### ► NOTES

1 - UL APPROVAL (E153691).

THE VALIDITY OF REPORTED DATA IS REFERRED TO THE DATE OF ISSUE. POSSIBLE UPDATES ARE AVAILABLE ON REQUEST.

0804/1606